


Model No.: GPCR123A

Description	: Lithium Battery, 2/3A Size
Chemical System	: Lithium Manganese Dioxide
Nominal Voltage	: 3.0 Volts
Nominal Capacity	: 1500mAh (Discharge at 2mA to 2.0V at 23°C)
Dimensions	: Ø17 mm x 34.5 mm
Terminals	: Flat, Recessed Negative Terminal
Jacket	: PVC Resin Label
Shelf Life	: Up to 10 years
Average Weight	: App. 16g
Application	: Cameras, flashlights, memory back-up, medical equipment, meters (gas/electric/water), photo flash, electronic guns, etc.
Operating Temperature	: -40°C to 60°C

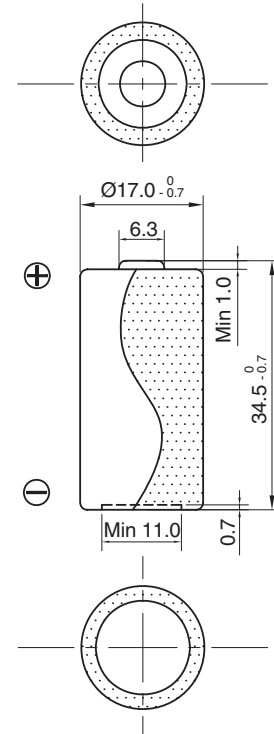


Unit : mm


Cross References:

Eveready	Duracell
EL 123AP	DL 123A


2mA continuous discharge to 2.0V at 23°C

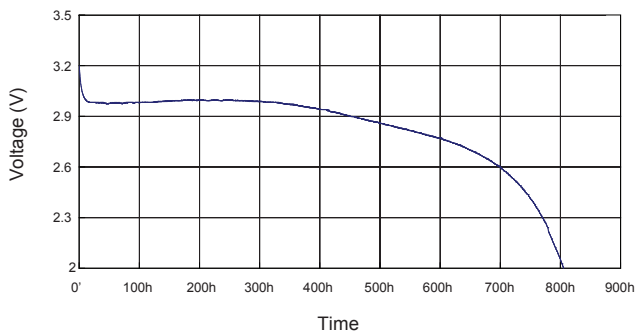


10mA continuous discharge to 2.0V at 23°C

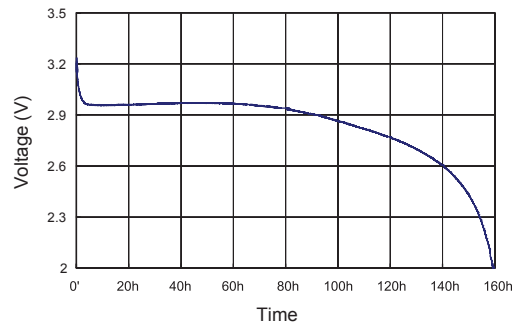

100mA continuous discharge to 2.0V at 23°C

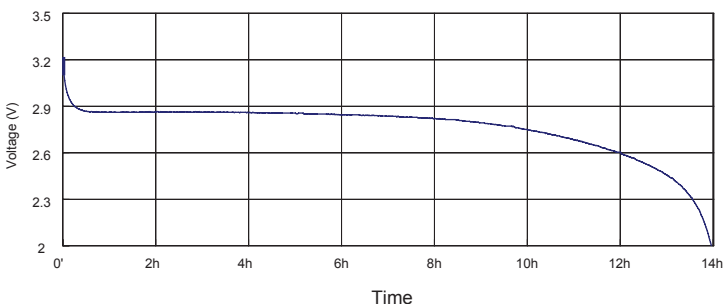

100Ω continuous discharge to 2.0V at 23°C & -20°C

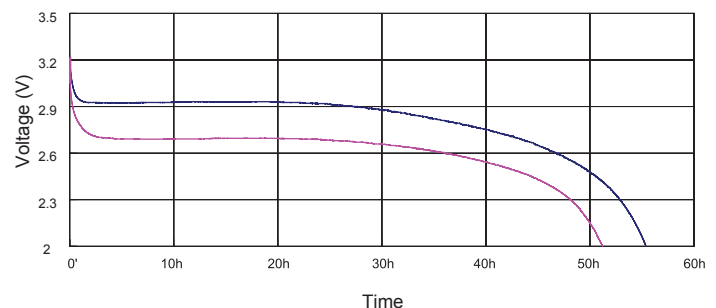

The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult your nearest GP Sales and Marketing Office or Distributors.

www.gpbatteries.com

Manufacturer reserves the right to alter or amend the design, model and specification without prior notice.
Copyright © GPI International Ltd. - All rights reserved

Member
Gold Peak Group

09140114102