

Elevating the Art of Photography




7642 Woodwind Drive Huntington Beach, CA 92647 Phone: (714) 849-5700 Fax: (714) 849-5677


Please visit us online at: www.thkphoto.com

Product photos are not to scale.

Specifications and appearance subject to change without notice.

2010-2011 PRODUCT BROCHURE

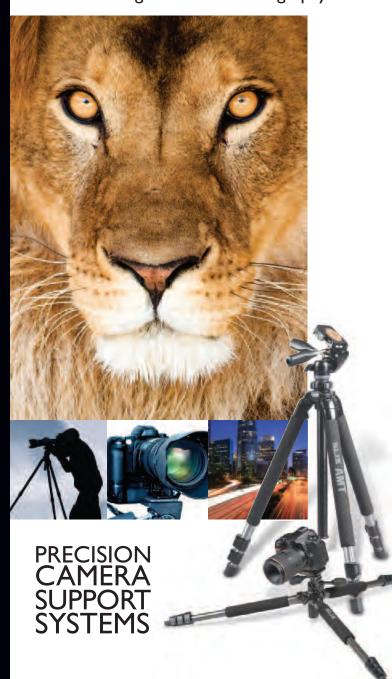

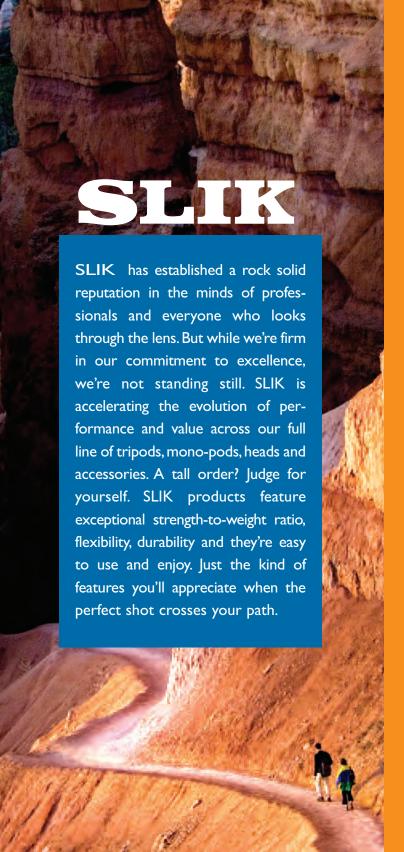

## Elevating the Art of Photography



#### LIGHTER

Let's start at the top. With its professional raw carbon appearance, SLIK's expanded line of PRO CF Carbon Fiber Tripods sets a new standard for portability and durability. The multi-layered carbon fiber construction creates a tripod that is more rigid and 30-40% lighter than comparable aluminum tripods. So you can pack light, shoot large and tell the chiropractor to take a hike. (see page 2 & 5)

#### **STRONGER**

A.M.T. is the big news with SLIK's PRO DX Series. SLIK's Super Alloy A.M.T. construction features the exact combination of aluminum, magnesium and titanium to create tripods that are lighter and up to 40% stronger than comparable aluminum tripods. Heavy stuff? Guess again. (see pages 8-13)

### **VALUE**

Think you can't afford SLIK quality and performance? The ABLE 300 series offers professional strength and versatility with the bonus of exceptional value. Offering many of the same features as the top of the line Pro series, the ABLE 300 is ready, willing—and you know the rest.

#### VERSATILITY

Why compromise? A world class SLIK tripod begs for a SLIK head. Build your complete system with a SLIK Ball Head 800, AF2100 Ball Head or Standard Ball Head II. These heads are smart. Really. They give you stability, easy operation and long lasting performance. Guaranteed.

#### BACKGROUND

SLIK was founded in 1952 as Slick Elevator Tripod Co., Ltd. From the inception, the Company was focused on creating better solutions that give photographers the freedom to expand their boundaries. SLIK's commitment to innovation attracted a loyal following while earning recognition well beyond the industry. Milestone: In 1967, SLIK won the first of many "Good Design Awards" from the Ministry of Trade and Industry of Japan. (Not easy to do.) If you take for granted such features as low to high movement, lever leg lock and guick-release, well surprise. SLIK pioneered these features and continues to refine the art of tripods with award winning designs and innovations. We invite you to experience the best that money can buy. Now, go out and make some history of your own.

#### **BEYOND**

What's over the next bluff on the horizon of evolution? Look for SLIK to be there ahead of the pack. Our research, design and engineering team is shattering conventions, on a quest to elevate the art of photography.

# carbon fiber



Carbon Fiber materials are also used in rockets, the Space Shuttle, and jets. Yes, it truly is rocket science.



Reversible Head screw on SLIK CF 8 and 9 series.



Lock control for the multiangle leg locks.



A.R.S. (Anti-rotational System) designed into the legs and leg locks of all SLIK PRO Carbon Fiber tripods.

In photography, a lot of time is spent getting to the location where you want to shoot. Sometimes in airplanes, trucks, buses, and often on foot. SLIK carbon fiber tripods greatly reduce the weight you have to pack, and can make the experience of "getting there" as enjoyable as getting the shots when you arrive. Designed for medium format cameras, digital and 35mm SLRs using long zoom or telephoto lenses.

#### **MULTI-LAYERED CARBON FIBER**

This rigid material is 30-40% lighter than aluminum. SLIK PRO CF tripods are finished in the natural black carbon fiber color.

### REVERSIBLE HEAD ATTACHMENT SCREW

The Pro 8 and 9 series include a reversible head mounting stud - 3/8" and 1/4-20.

#### **MULTI-ANGLE LEG LOCKS** WITH BUILT-IN SHORT COLUMN

Each leg has an independent lock that sets in one of 3 angles to vary the height of the tripod for maximum height, waist level or very low angle photography. This also allows the tripod to be set up easily on uneven ground or steps. SLIK's built-in short column feature allows the center column to unscrew into two pieces for low angle photography.

#### LEG-LOCK TYPE

Twist lock system with double nut ring (crown-cap) type. (PAT.).

#### A.R.S. (ANTI-ROTATIONAL SYSTEM)

All new SLIK PRO carbon fiber tripods feature a new A.R.S. (Anti-Rotational System) designed into the legs and leg locks. The A.R.S. systems prevents the leg tubes from rotating inside each other making it much easier to lock and release all the twist-release locks securely. The rubber grips have also been increased in diameter slightly making them easier to operate.

This combined with the A.R.S. system will speed setting up and putting away the tripod making it more convenient to take with you and use on the go.

#### **GRAND PRO 4 CF**

Max. Operating Height: 100.00 in. Min.Operating Height: 17.70 in. Folded Length: 32.48 in. Max. Operating Load: 44.00 lbs. Weight: 8.45 lbs.

- Carbon Fiber PROFESSIONAL series tripod
- Capable of holding over 30 lbs. of equipment more than 8 ft. off the ground



#### **PRO 924 CF**

Max. Operating Height: 70.50 in. Min.Operating Height: 7.10 in. Folded Length: 21.80 in. Max. Operating Load: 26.46 lbs. Weight: 5.09 lbs.

- 4 leg sections allow this tripod to close down to a much smaller size for easier carrying
- Weighing only 5 lbs but able to handle more than 26 makes it great for use with long telephoto lenses



#### **PRO 923 CF**

Max.Operating Height: 74.80 in. Min.Operating Height: 8.50 in. Folded Length: 27.90 in. Max. Operating Load: 26.46 lbs. Weight: 5.11 lbs.

- Perfect for using heavy lenses or cameras either in the field or in the studio.
- 3 legs sections allow fast set up and close down of this tripod



## carbon fiber

## NEW

#### PRO 824 CF 615-387

Max. Operating Height: 64.10 in. Min. Operating Height: 7.60 in. Folded Length: 18.80 in. Max. Operating Load: 18.00 lbs. Weight: 3.49 lbs.

- 4 section legs allow this tripod to close down to a much smaller package- which is easier to carry
- A must for the Nature Photographer
- Tripod head mount is a reversible 3/8 or 1/4-20



## NEW

#### PRO 724 CF 615-391

Max.Operating Height: 64.40 in. Min.Operating Height: 7.10 in. Folded Length: 18.10 in. Max.Operating Load: 11.00 lbs. Weight: 3.11 lbs

- 4 leg sections allow this tripod to close down to a much smaller package- which is perfect for carrying and traveling
- Dual center column locks with tension control
- Built-in short column for low angle photographer and a hook at the bottom of the center column for adding weight

## NEW

#### PRO 634 CF 611-616

Max.Operating Height: 63.10 in. Min.Operating Height: 3.70 in. Folded Length: 18.00 in. Max.Operating Load: 7.05 lbs. Weight: 2.05 lbs.

- The most compact SLIK Carbon Fiber tripod that extends to eye-level
- 4 section legs allow this tripod to close down to a much smaller package - which is easier to carry
- At less than 2 pounds this is the perfect traveling companion





## NEW

#### PRO 823 CF 615-386

Max.Operating Height: 66.30 in. Min.Operating Height: 9.30 in. Folded Length: 23.60 in. Max.Operating Load: 18.00 lbs. Weight: 3.56 lbs.

- Dual center column locks with tension control
- Built-in short column Tripod head mount is a reversible 3/8 or 1/4-20



## NEW

#### PRO 723 CF

615-390

Max.Operating Height: 65.40 in. Min.Operating Height: 8.10 in. Folded Length: 22.50 in. Max.Operating Load: 11.00 lbs. Weight: 3.09 lbs.

- Slimmer diameter carbon fiber tubing reduces weight while maintaining rigid performance
- Dual Center column locks with tension control
- Built-in short column



## NEW

#### **PRO 624 CF**

611-615

5

Max.Operating Height: 47.40 in. Min.Operating Height: 3.94 in. Folded Length: 16.34 in. Max.Operating Load: 8.80 lbs. Weight: 1.81 lbs.

The smallest, most compact SLIK carbon fiber tripod





Designed for the professional photographer. Ultra heavy construction for use with large format cameras (4"x 5", 8"x10"), medium format cameras and 35mm SLR cameras with long telephoto/zoom lenses.

#### **MULTI-ANGLE LEG LOCKS**

Each leg has an independent lock that sets in one of 3 angles to vary the height of the tripod for maximum height, waist level or very low angle photography. This also allows the tripod to be set up easily on uneven ground or steps.

#### **GROOVED TUBULAR LEGS**

The groove prevents the leg from turning during extension or retraction, and it allows simple and secure locking. It adds rigidity to an already dynamically strong circular tubing.

#### INDEXED REFERENCE MARKS

The 2nd leg section has reference groove marks at 10cm intervals, to allow easy and even height adjustments.

The center column elevation moves only by turning the elevation crank preventing any accidental fall of a mounted camera.

#### THE PROFESSIONAL 616-850

Max.Operating Height: 78.75 in. Min.Operating Height: 23.22 in. Folded Length: 40.95 in. Max. Operating Load: 26.45 lbs. Weight: 13.90 lbs.

- Complete, with head
- Also available as head only and legs only

HEAD ONLY (SH-909) 618-909 LEGS ONLY 619-950

6

#### LARGE/SMALL THREAD CAMERA MOUNTING SCREW

The professional series has both large 3/8" and small 1/4-20 thread. When not in use, the screw fits into the side of the head where it's out of the way yet always handy.

### REVERSIBLE HEAD ATTACHMENT SCREW

The reversible head attachment screw on the center elevation post lets heads with either 1/4-20 or 3/8 screw holes be used.

#### **DUAL AXIS BUBBLE LEVELS**

The head has 2 bubble levels for easy and accurate camera leveling. They are recessed under the camera mount plate to avoid damage.

#### SHORT CENTER COLUMN

By exchanging the center elevation column to a short center column (optional accessory), you can obtain a very low height of 15".



#### THE PROFESSIONAL 4

Max.Operating Height: 99.50 in. Min.Operating Height: 23.22 in. Folded Length: 42.30 in. Max. Operating Load: 26.45 lbs. Weight: 15.20 lbs.

- Complete, with head
- Also available as head only and legs only

**HEAD ONLY (SH-909)** 618-909 LEGS ONLY 619-975



### THE PROFESSIONAL II LE 616-816

Max.Operating Height: 72.25 in. Min.Operating Height: 23.22 in. Folded Length: 37.40 in. Max.Operating Load: 22.00 lbs. Weight: 10.35 lbs.

- Complete, with head
- Also available as head only and legs only

HEAD ONLY (SH-908) 618-908 LEGS ONLY 616-817

#### MASTER CLASSIC

Max.Operating Height: 64.10 in. Min.Operating Height: 24.75 in. Folded Length: 25.59 in. Max. Operating Load: 13.25 lbs. Weight: 5.65 lbs.

- SLIK's classic tripod with 3-section grooved legs and multi-action head
- Professional 2-way pan head is perfect for long telephoto lenses
- Also available as head only and legs only

MASTER CLASSIC HEAD

2-way pan head for telephoto lens

LEGS ONLY 619-910





#### PRO 78 0 DX

### PROFESSIONAL, RELIABLE, AFFORDABLE

Depending on the model, the PRO Series is designed for everything from professional digital SLR and film cameras, medium format, or field 4x5 view cameras all the way to point-and-shoot digital cameras.

#### SPEED RELEASE LEG LOCKS

The secure lever locking mechanism makes for fast and easy set up and fold down of the PRO Series.



#### **GEARLESS CENTER COLUMN**

Easy release center column. Locking collar frees movement of the center column in both vertical and horizontal directions, which means you can work faster. The center column has two ways of locking in place. The first is a twist release collar around the center column. The other, a thumb-screw on the side of the tripod.

#### **MULTI-ANGLE LEG LOCKS**

Each leg has an independent lock that sets in one of 3 angles to vary the height of the tripod for maximum height, waist level or very low angle photography. This also allows the tripod to be set up easily on uneven ground or steps.

#### THE AMT DIFFERENCE

Constructed from SLIK super A.M.T. alloy (Aluminum Magnesium Titanium) offers an exceptional strength-to-weight

ratio that is more than 40% greater than similar aluminum tripods. SLIK AMT is used in the PRO 700 DX, PRO 500 DX, PRO 340 DX, and PRO 330DX.

#### PRO 780 DX 615-780

Max.Operating Height: 76.80 in. Min.Operating Height: 16.25 in. Folded Length: 32.40 in. Max. Operating Load: 19.80 lbs. Weight: 6.95 lbs.

- New SH-807E 3-Way Head with Quick Release System and 3-axis bubble levels
- Strong & Light PRO 700 A.T.M. Alloy legs in Black
- Great for Digital SLRs. Medium Format and 4x5 view cameras
- Padded Leg Wraps



## PRO 700 DX 615-315 Max.Operating Height: 74.80 in. Min. Operating Height: 24.40 in. Folded Length: 29.92 in. Max. Operating Load: 18.00 lbs. Weight: 7.05 lbs. A professional tripod using SLIK A.M.T. alloy uses Titanium and Magnesium to reduce weight, making it great for serious location work Able to handle from digital and 35mm up to a 4x5 field camera New padded leg wraps!

615-900

PRO 700 DX LEGS



# professional

#### PRO 580 DX

615-580

Max.Operating Height: 64.20 in. Min.Operating Height: 13.80 in. Folded Length: 27.00 in. Max. Operating Load: 13.20 lbs. Weight: 5.38 lbs.

- New SH-806E 3-Way Pan Head with Quick Release System and 3-axis bubble levels
- Strong & Light PRO 500 A.T.M. Alloy legs in Black
- Great for Digital SLRs
- Padded Leg Wraps



#### **PRO 500 DX**

615-320

Max.Operating Height: 63.95 in. Min.Operating Height: 13.80 in. Folded Length: 27.38 in. Max.Operating Load: 13.20 lbs. Weight: 5.47 lbs.

- SLIK exclusive AMT alloy legs tubing for lighter weight but better rigidity
- Perfect for people serious about photography but still want the best value in a sturdy camera support
- SLIK Speed-Release leg locks for fast and easy set-up and put away
- All-metal 3-way pan head with quick-release plate





#### **PRO 500 DX LEGS BLACK**

615-324

10

Separate legs from PRO 500 DX tripod



#### **PRO 500 HD**

615-501

Max.Operating Height: 64.90 in. Min.Operating Height: 13.93 in. Folded Length: 27.93 in. Max. Operating Load: 11.02 lbs. Weight: 5.91 lbs.

- NEW all-metal 3-way "Fluid-Effect" pan head for HD video with Digital SLR cameras
- Seperate pan and tilt drag controls smoothly adjust resistance to movement like a professional video head
- Lightweight AMT alloy legs make for a lighter tripod that is easier to carry

The PRO 500 HD was created for DSLR's that have HD video recording capability. The SH-736HD is a smooth-moving fluid effect 2-way pan head with guick release for easy mounting and removal of a DSLR, video camera or camera. This all-metal head is specifically designed for photo and video use. The 2-way pan head moves in two directions like a professional video head.

The SH-736HD has pan and tilt drag controls that are separate from the the pan/tilt handle locks. This allows the photographer to fine-tune the tightness of the movement based on the weight of the camera and lens. The head can hold up to 11.0 lbs of equipment.

# professional

#### **PRO 340 BH**

613-344

Max.Operating Height: 57.75 in. Min.Operating Height: 10.00 in. Folded Length: 20.28 in. Max.Operating Load: 8.80 lbs Weight: 3.26 lbs.

- New SHB-200DQ ball head with quick release system
- Dual bubble levels on the head
- Strong & Light PRO 340 AMT alloy legs
- 4 leg sections to fold down smaller for easier packing and travel



## NEW

#### **PRO 340 QF** 613-345

Max. Operating Height: 57.30 in. Min.Operating Height: 10.75 in. Folded Length: 20.87 in. Max.Operating Load: 8.00 lbs Weight: 3.92 lbs.

- Compact light-weight AMT alloy tripod.
- 4 leg sections allow this tripod to close down to a much smaller size for easier carrying, great for backpacking
- 504 QF-II Fluid-Effect video head is great for smooth movement with light-weight HD Digital



12

#### PRO 340 EZ 613-034

Max.Operating Height: 57.30 in. Min.Operating Height: 10.00 in. Folded Length: 19.50 in. Max.Operating Load: 8.00 lbs. Weight: 3.23 lbs.

- NEW E-Z Multi-action pan head with single handle control
- Quick Release System
- Strong & Light PRO 330 A.T.M. Alloy legs in Black
- 4 leg sections to fold down smaller for easier travel



## **PRO 340 DX**

613-340

Max.Operating Height: 57.90 in. Min.Operating Height: 18.11 in. Folded Length: 19.29 in. Max.Operating Load: 8.80 lbs. Weight: 3.48 lbs.

- A professional tripod using SLIK A.M.T. alloy uses Titanium and Magnesium to reduce weight
- 4 leg sections allow it to fold down smaller for easy transportation
- Recommended for high-end point and shoot digital cameras



PRO 340 DX BLACK PRO 340 DX (LEGS ONLY) 613-338 613-339

# professional

#### PRO 330 DX

613-330

Max. Operating Height: 63.00 in. Min.Operating Height: 20.07 in. Folded Length: 23.60 in. Max. Operating Load: 8.80 lbs. Weight: 3.46 lbs.

- Superb value
- Light weight and compact
- Recommended for 35mm cameras
- Short column available
- New soft grip padded leg wraps for comfort and ease of handling
- A.M.T. alloy legs









Max.Operating Height: 62.00 in. Min.Operating Height: 11.25 in. Folded Length: 23.40 in. Max.Operating Load: 8.80 lbs. Weight: 3.66 lbs.

- NEW E-Z Multi-action pan head with single handle control
- Quick Release System
- Strong & Light PRO 330 A.T.M. Alloy legs in Black
- Padded Leg Wraps



**PRO 400 DX** 

Max.Operating Height: 61.00 in. Min.Operating Height: 12.99 in. Folded Length: 25.60 in. Max.Operating Load: 11.00 lbs. Weight: 5.60 lbs.

615-400

- All metal construction
- Soft grip coated legs for comfort and ease of handling
- Light enough to carry easily, strong enough for regular use
- Speed release leg locks for quick set up
- Recommended for 35mm and medium format cameras



#### ABLE 300 DX

615-310

Max. Operating Height: 61.00 in. Min.Operating Height: 18.50 in. Folded Length: 25.80 in. Max. Operating Load: 11.00 lbs. Weight: 5.75 lbs.

- All metal construction
- Soft grip coated legs for comfort and ease of handling
- Light enough to carry easily, strong enough for regular use
- Speed release leg locks for quick set up
- Recommended for 35mm and medium format cameras






Designed to travel, designed for photography, the SPRINT line of tripods can greatly improve photos by stabilizing your camera, which is critically important for sharp pictures. These all-metal tripods have strength combined with compact size to travel with ease.

#### **SPRINT PRO II GM**

611-849

Max.Operating Height: 63.60 in. Min.Operating Height: 6.70 in. Folded Length: 18.50 in. Max.Operating Load: 4.50 lbs.

Weight: 1.96 lbs.



4 leg sections for compact and easy traveling, only 18.5 in. folded

SLIK Speed-Release leg locks for quick set up







#### **SPRINT PRO II 3-WAY GM**

Max.Operating Height: 63.85 in. Min.Operating Height: 6.95 in. Folded Length: 18.50 in. Max. Operating Load: 4.50 lbs. Weight: 2.38 lbs.

- SH-704E 3-way pan head with quick release system
- 4 leg sections for compact and easy traveling, only 18.5 in. folded
- SLIK Speed-Release leg locks for quick set up
- Padded Leg Wraps



#### **SPRINT PRO EZ**

Max.Operating Height: 64.4 in. Min.Operating Height: 7.25 in. Folded Length: 19.10 in. Max.Operating Load: 4.50 lbs. Weight: 2.82 lbs.

- NEW E-Z Multi-action pan head with single handle control
- Quick Release System
- Compact and steady SPRINT PRO Legs
- Padded Leg Wraps

BLACK

611-845

Sometimes a full sized tripod is more than you need or too much to handle. SLIK answers your camera support needs with these compact tripods.



#### **SPRINT PRO II 3-WAY BK**

611-863

Max.Operating Height: 63.85 in. Min.Operating Height: 6.95 in. Folded Length: 18.50 in. Max.Operating Load: 4.50 lbs. Weight: 2.38 lbs.

- SH-704E 3-way pan head with quick release system
- 4 leg sections for compact and easy traveling, only 18.5 in. folded
- SLIK Speed-Release leg locks for quick set up.
- Padded Leg Wraps



#### SPRINT MINI II GM

611-806

Max.Operating Height: 43.30 in. Min.Operating Height: 6.38 in. Folded Length: 13.80 in. Max.Operating Load: 4.50 lbs. Weight: 1.72 lbs.

- No... CDII 100DO h
- New SBH-100DQ ball head with quick release system
- Folds down to less than 14 inches for easy travelng
- SLIK Speed-Release leg locks for quick set up
- Padded Leg Wraps

### VIDEO SPRINT II 617-520

Max.Operating Height: 63.86 in. Min.Operating Height: 6.00 in. Folded Length: 18.50 in. Max.Operating Load: 4.50 lbs. Weight: 2.29 lbs.

- SPRINT tripod legs with "Fluid-Effect" 2-way pan head
- Speed Release leg locks for quick and easy set-up and fold down
- Quick-release camera mount plate



## COMPACT II

611-461

Max.Operating Height: 38.98 in. Min.Operating Height: 14.17 in. Folded Length: 14.17 in. Max.Operating Load: 2.75 lbs. Weight: 1.25 lbs.

- With 4-section legs and a double extension center column
- Also available in black

BLACK

611-465B



MINI II 611-201

Max. Operating Height: 8.66 in. Min.Operating Height: 6.85 in. Folded Length: 8.03 in. Max. Operating Load: 2.75 lbs. Weight: 0.71 oz.

With speed-release leg locks





#### MINI-PRO III

611-351

Max.Operating Height: 9.64 in. Min.Operating Height: 7.87 in. Folded Length: 8.27 in. Max. Operating Load: 2.75 lbs. Weight: 11.30 oz.

Light weight ball head

The award-winning U212 DX is a world renowned design that has carefully evolved for 2 decades. Designed primarily for 35mm SLR cameras, the U212 DX is one of the world's most popular multipurpose tripods.



#### U 212 DX

612-212

Max. Operating Height: 63.50 in. Min.Operating Height: 8.25 in. Folded Length: 26.00 in. Max.Operating Load: 5.50 lbs. Weight: 5.60 lbs.

- Quick-release camera post for fast camera mounting
- 3-section speed release non-twist leg locks
- Ultra-smooth three-way pan head
- Thread mounting post on one leg lets you get down to just 8 inches from the ground
- Includes bubble level for accurate vertical positioning
- Winner, Japan Ministry of Trade and Industry "Good Design" (G-Mark) Award

### MINI-PRO V

611-352

Max.Operating Height: 8.58 in. Min.Operating Height: 6.81 in. Folded Length: 7.90 in. Max. Operating Load: 2.75 lbs. Weight: 12.20 oz.



#### **U9000**

617-900

Max. Operating Height: 59.00 in. Folded Length: 23.25 in. Max. Operating Load: 4.50 lbs. Weight: 3.50 lbs.

- Upper grade model featuring rubber/spike leg tips and a bubble level
- Smooth 3-way "Fluid Effect" pan head, excellent for still or light weight video cameras
- Quick-release plate for easy mounting and removal of camera or camcorder
- Geared center column



#### **U8000**

617-800

Max.Operating Height: 59.00 in. Folded Length: 23.25 in. Max.Operating Load: 4.50 lbs. Weight: 3.30 lbs.

- Great for still photo and video use
- Smooth 3-way "Fluid Effect" pan head, excellent for still or light weight video cameras
- Quick-release plate for easy mounting and removal of camera or camcorder
- Geared center column



#### F740 617-740

Max.Operating Height: 58.25 in. Folded Length: 20.86 in. Max.Operating Load: 4.50 lbs. Weight: 3.22 lbs.

- 3-way fluid effect pan head
- Quick Release plate for easy mounting and removal of digital camera or camcorder
- Geared center column



F163 617-163

Max. Operating Height: 51.78 in. Folded Length: 21.26 in. Max. Operating Load: 3.50 lbs. Weight: 2.34 lbs.

- Quick Release for easy mounting of the camera
- Bubble level
- Geared center column



F153 617-153

Max.Operating Height: 51.78 in. Folded Length: 20.48 in. Max.Operating Load: 3.50 lbs. Weight: 2.18 lbs.

- Quick Release for easy mounting of the camera
- Bubble level
- Geared center column

F630

617-630

Max.Operating Height: 57.87 in. Folded Length: 22.05 in. Max. Operating Load: 4.50 lbs. Weight: 2.91 lbs.

- 3-way fluid effect pan head
- Quick Release plate for easy mounting and removal of digital camera or camcorder
- Geared center column



F143

Max.Operating Height: 51.78 in. Folded Length: 20.48in. Max. Operating Load: 3.50 lbs. Weight: 2.14lbs.

- Quick Release for easy mounting of the camera
- Bubble level
- Gearless center column

22

## video

Created to yield professional results with today's 'Pro-Sumer' Mini DV and other video cameras. The DST-3 and DST-73 have durable all-metal fluid heads, professional bowl mounts and all metal camera mount plates.



## **DST-3** DW-DST3

Max.Operating Height: 59.45 in. Min.Operating Height: 13.70 in. Folded Length: 29.72 in. Max.Operating Load: 8.00 lbs. Weight: 6.28 lbs.

- All-metal 2-way fluid pan head
- 60mm professional bowl level mount for fast and easy leveling of the camera
- Camera mount post can be positioned forward or back for better camera balance



#### **DV TRAVEL PRO**

Max.Operating Height: 51.80 in. Min.Operating Height: 12.80 in. Folded Length: 26.60 in. Max.Operating Load: 8.00 lbs. Weight: 4.30 lbs.

- Light weight for easy traveling
- Fluid head for smooth pan and tilt movements
- 60mm bowl mount for quick and easy leveling of the head



## video



**515 QF** 617-515

Max.Operating Height: 65.15 in. Min.Operating Height: 29.55 in. Folded Length: 29.90 in. Max.Operating Load: 11.00 lbs. Weight: 8.20 lbs.

- Sturdy, heavy-duty 505 QF legs with new all-metal smooth moving pantilt "Fluid-Effect" head
- New Digital Balance head with long-slide Quick Release plate for better balance of video camera with accessories attached
- All-metal mid-level spreader



615-505

Max.Operating Height: 64.55 in. Min.Operating Height: 29.55 in. Folded Length: 29.55 in. Max.Operating Load: 11.00 lbs. Weight: 7.95 lbs.

- All-metal 2-way "Fluid Effect" pan head
- Adjustable pan handle angle
- Geared center column for easy height adjustments



618-665

New all-metal video head with long-slide quick release plate for better balancing of a video camera with accessories attached.

Height: 4.65 in. Weight: 2.80 lbs.

Max. Operating Load: 11.00 lbs.

**504 QF-II** 615-504

Max.Operating Height: 61.40 in. Min.Operating Height: 18.50 in. Folded Length: 27.10 in. Max.Operating Load: 8.00 lbs. Weight: 5.65 lbs.

- 2-way "Fluid Effect" pan head
- Adjustable pan handle angle



**504 QF-II HEAD** 618-504 *Max.Operating Load: 8.00 lbs. Weight: 1.50 lbs.* 





#### PRO 340 QF

613-345

Max.Operating Height: 57.30 in. Min.Operating Height: 10.80 in. Folded Length: 20.90 in. Max.Operating Load: 6.61 lbs. Weight: 3.92 lbs.

- Compact light-weight AMT alloy tripod.
- 4 leg sections allow this tripod to close down to a much smaller size for easier carrying, great for backpacking
- 504 QF-II Fluid-Effect video head is great for smooth movement with light-weight HD Digital SLRs or video cameras





## monopods



#### THE PRO POD

618-720

Max.Operating Height: 71.60 in. Min.Operating Height: 23.85 in. Max.Operating Load: 20.00 lbs. Weight: 2.3 lbs.

- Heavy Duty Professional Monopod
- Twist Release legs locks to hold more weight



Max.Operating Height: 59.05 in. Min.Operating Height: 19.70 in. Max.Operating Load: 11.00 lbs.

Weight: 0.85 lbs.

- 30% lighter weight, surprisingly strong carbon fiber make this perfect for traveling
- Telescoping leg sections do not rotate inside each other making it faster and easier to extend and close
- 4 leg sections keep this monopod very short for easy carrying



Max.Operating Height: 63.00 in. Min.Operating Height: 21.05 in. Max.Operating Load: 12.00 lbs. Weight: 1.30 lbs.

A sturdy light weight monopod for the working professional

- Made from SLIK's A.M.T. (Aluminum Magnesium Titanium) alloy, this monopod is lighter and stronger than standard aluminum
- Firm-grip surface provides a rock solid hold in any weather
- Speed release snap locks make extending and retracting the legs fast and easy
- 4 leg sections

#### **S-POLE II**

Max. Operating Height: 63.38 in. Min. Operating Height: 21.65 in. Max. Operating Load: 8.00 lbs. Weight: 1.28 lbs.



- S-POLE II can be reversed and attached to the legs of a MINI PRO III or MINI PRO V for greater stability
- Secure Twist lock legs
- Though the S-POLE II can free-stand, it will be very top-heavy with camera attached, do not leave unattended.

28

SLIK monopods give you an easy, go-anywhere support system for your camera. Though they cannot stand by themselves, they support the camera's weight and eliminate undesirable vertical movement or "shake" that occurs with hand-held use. Your pictures will be sharper and more clear.

#### MONOPOD 350

618-350

Max.Operating Height: 63.00 in. Min.Operating Height: 20.05 in. Max.Operating Load: 8.00 lbs. Weight: 0.65 lbs.



- A superb light-weight general use monopod
- Soft padded grip for a rock steady hold
- Grooved tubular leg for added rigidity
- Speed release leg locks make extending and retracting the monopod fast and easy



#### **EZ POD**

617-400

Max.Operating Height: 61.80 in. Min.Operating Height: 18.50 in. Max.Operating Load: 8.50 lbs. Weight: 1.45 lbs.

- Speed release leg locks and a onebutton control for fine height adjustment make this a truly easy monopod to use
- Includes Tilt-head with quickrelease plate with post for video cameras. Excellent for video recording with compact digital and



**SLIM POD II** 

628-450

Max.Operating Height: 60.20 in. Min.Operating Height: 19.69 in. Max.Operating Load: 2.75 lbs. Weight: 0.62 lbs.

- Thin, ultra light weight, economical monopod with lever lock leg system
- 4 leg sections



EZ POD JR.

617-200

Max.Operating Height: 63.00 in. Min.Operating Height: 20.25 in. Max.Operating Load: 8.50 lbs. Weight: 1.10 lbs.

- Same speed release leg locks but without the one-button fine height adjustment
- Includes Tilt-head with quick-release plate with post for video cameras
- 5 leg sections



LIGHTY POD-III 618-7

Max.Operating Height: 63.00 in. Min.Operating Height: 20.50 in. Max.Operating Load: 6.60 lbs. Weight: 1.00 lbs.

- Light-weight and compact for easy traveling
- Inexpensive and high-quality
- SLIK ball head included



## pan heads





Heavy Duty 3-Way Pan Head with smooth precise movements

Height: 5.71 in. Weight: 3.75 lbs.

Max.Operating Load: 26.00 lbs.



SH-908

618-908

Heavy Duty 3-Way Pan Head with smooth precise movements

Height: 5.31 in. Weight: 3.00 lbs.

Max. Operating Load: 22.00 lbs.



SH-807E

618-807

Precision 3-way Pan Head with 3 bubble levels. 1 for each axis

Height: 5.86 in. Weight: 2.14 lbs.

Max. Operating Load: 22.00 lbs.



SH-806E

618-806

Precision 3-way Pan Head with 3 bubble levels, 1 for each axis

Height: 5.27 in. Weight: 1.52 lbs.

Max. Operating Load: 15.00 lbs.



#### SH-736 HD

618-565

All-metal 3-way pan head with fluid-effect design. Independent pan and tilt drag controls makes this great for use with HD capable digital SLRs

Height: 4.10 in. Weight: 1.48 lbs.

Max.Operating Load: 11.02 lbs.





PRO 700 DX HEAD

615-700

3-way Pan Head with quick-release plate

Height: 4.72 in. Weight: 2.20 lbs.

Max.Operating Load: 18.00 lbs.



ABLE 300 DX HEAD

**D** 615-330

3-way Pan Head with quick-release plate

Height: 4.10 in. Weight: 1.42 lbs.

Max. Operating Load: 13.00 lbs.



SH-707E

618-717

E-Z Multi-action pan head with single handle for multi-movement control

Height: 3.35 in. Weight: 1.00 lbs.

Max. Operating Load: 8.80 lbs.

Recommended tripods: PRO 400 DX, PRO 330/340 DX, PRO 813/814 CF-II, PRO 713/714 CF-II, PRO 613/614 CF. SPRINT PRO



MASTER CLASSIC PAN HEAD

619-710

Professional 2-Way pan head with single handle for multi-movement control. Perfect for tracking moving subjects with telephoto lenses

Height: 5.10 in. Weight: 1.54 lbs.

Max. Operating Load: 13.25 lbs.

Recommended tripods: MASTER CLASSIC, PRO 500 DX, PRO 400 DX, PRO 883 CF-D, PRO 813-814 CF-II. PRO 731-714 CF-II



SH-705E

615-335

3-way Pan Head with quick-release plate

Height: 3.75 in. Weight: 1.12 lbs.

Max. Operating Load: 11.00 lbs.

Recommended tripods: PRO 713 CF-II, PRO 813 CF-II, PRO 814 CF-II, PRO 500 DX, PRO 330 DX. PRO 430 DX



SH-704E

618-640

3-way Pan Head with quick-release plate

Height: 2.95 in. Weight: 0.64 lbs.

Max. Operating Load: 7.00 lbs.

Recommended tripods: PRO 713 CF-II,

PRO 613 CF, PRO 614 CF

32

# ball heads

#### **AF 2100 TRIGGER-RELEASE BALL HEAD**

618-210

The world's most popular trigger-style ball head

Height: 5.50 in. Weight: 30.70 oz.

Max. Operating Load: 10.00 lbs.

Recommended tripods: PRO 713/813/814 CF Carbon Fiber tripods, PRO 700 DX, PRO 400 DX

Recommended MONOPODS: PRO POD 381, PRO POD 600

- The original trigger style ball head
- Simply squeeze the trigger handle to move the head, and let go to lock in any position
- The handle grip makes the ball head feel like more of an extension of your hand than other ball heads available
- Winner, Japan Ministry of Trade and Industry "Good Design" (G-Mark) award



Just as important as the tripod legs is the head. For decades our ball heads have been made to exacting standards to perform smoothly and reliably under a wide range of conditions. From the studio to the Outback, they work beautifully with a wide variety of tripods from SLIK and other high quality tripod manufacturers.

### **BALL HEAD 800**

618-708

Large guick shoe for a sure and easy camera mounting, plus a rotating feature which adds to more creative freedom

Height: 5.10 in. Weight: 26.50 oz.

Max. Operating Load: 11.00 lbs.

Recommended tripods: PRO 700 DX. The PROFESSIONAL (all models)

- Our workhorse ball head
- Large quick-release shoe for sure and easy camera mounting
- Oversized, easy grip release knob for fine adjustments in head movement tension



- Recommended for 35mm up to 4x5 field and light weight view cameras
- Winner, Japan Ministry of Trade and Industry "Good Design" (G-Mark) award
- Separate tension adjustment and pan lock controls

#### AF 1100E TRIGGER-RELEASE BALL HEAD

618-111

New with all-metal Quick-Release plate

Height: 4.85 in. Weight: 18.80 oz.

Max. Operating Load: 6.50 lbs.

Recommended tripods: PRO 814 CF-II. PRO 813 CF-II, PRO 713 CF-II, PRO 614 CF, PRO 613 CF, PRO 330 DX, PRO 340 DX

Recommended MONOPODS: PRO POD 381 CF. PRO POD 600. MONOPOD 350. PRO 500 DX

- More compact for today's high-end point-and-shoot digital cameras
- Simply squeeze the trigger handle to move the head, and let go to lock in any position
- The hand grip makes the ball head feel more like an extension of your hand than other ball heads
- Bubble-level for easy and accurate leveling of the camera



#### STANDARD BALL HEAD-II 618-709

High quality construction at an economical price makes a great value

Heiaht: 4.00 in. Weight: 10.60 oz.

Max. Operating Load: 4.50 lbs.

Recommended tripods: PRO 713/813/814 CF-II Carbon Fiber tripods, PRO 400 DX, ABLE 300 DX.PRO 330 DX. PRO 340 DX

- Precision milled aluminum components
- Large easy-to-use one lever lock action
- Large camera mount plate for more support

# ball heads

#### **SBH-280 DQ**

Metallic Gray: 618-323 Black: 618-322

Height: 3.66 in. Weight: 8.80 oz.

Max.Operating Load: 11.00 lbs.

 Magnesium Quick Release
 System with low-profile Q. R.
 plate, comfortable to leave on the camera all the time

Recommended tripods: PRO 713/813/814 CF carbon Fiber tripods, PRO 400 DX, ABLE 300 DX,PRO 330 DX, PRO 340 DX

Recommended monopods: THE PRO POD, PRO POD 381, PRO POD 600, MONOPOD 350, PRO 500 DX



#### SBH-320 DQ

Metallic Gray: 618-321 Black: 618-320

Height: 4.00 in. Weight: 14.10 oz.

Max. Operating Load: 15.00 lbs.

 Magnesium Quick Release System with low-profile Q. R. plate, comfortable to leave on the camera all the time

Recommended tripods: PRO 713/813/814 CF carbon Fiber tripods, PRO 700 DX, PRO 400 DX

Recommended monopods: THE PRO POD, PRO POD 381, PRO POD 600, MONOPOD 350, PRO 500 DX **SBH-200 DQ** 618-326

High-quality compact ball head with a Quick Release system

Height: 3.40 in. Weight: .75 lbs.

Max. Operating Load: 8.8 lbs.

Recommended Tripods: PRO 614 CF, PRO 613 CF, PRO 400 DX, PRO 330 DX, PRO 340 DX, SPRINT PRO II

Recommended Monopods: PROPOD 381 CF, PROPOD 600, MONOPOD 350.



## SBH-280E

618-193

Economical version of the SBH-280 with a Quick Release system

Height: 4.15 in. Weight: .75 lbs.

Max.Operating Load: 11.00 lbs.

Recommended Tripods: PRO 614 CF, PRO 613 CF, PRO 500 DX, PRO 400 DX, PRO 330 DX, PRO 340 DX, SPRINT PRO II

Recommended Monopods: PROPOD 381 CF, PROPOD 600, MONOPOD 350



## SBH-550

Metallic Gray: 618-625 Black: 618-624

Height: 4.57 in. Weight: 20.80 oz.

Max.Operating Load: 22.00 lbs.

Recommended tripods: PRO 700 DX, The PROFESSIONAL (all models)

Made from precision machined and carefully anodized hardened aluminum, these professional ball heads are engineered to give years of smooth operation



mond textured surface for a sure grip in any condition

Oversized locking knob with dia-

- Finely machined ball and socket
- Large camera mount plate for extra stability
- Built-in turning anti-scratch plate to protect the camera



# ball heads



Compact economical and easy to use, these ball heads are an excellent value

- All metal construction
- Simple, one lever operation

### **SBH-60**

Black: 618-606 Height: 1.90 in. Weight: 1.70 oz. Max.Operating Load: 1.25 lbs.

#### SBH-100

Black: 618-610 Height: 2.50 in. Weight: 3.50 oz.

Max. Operating Load: 3.5 lbs.

#### SBH-120

Black: 618-612 Height: 2.90 in. Weight: 4.60 oz. Max.Operating Load: 4.5 lbs.



**CLAMP HEAD 32** 618-021

Height: 3.15 in.
Weight: 14.10 oz.

Max.Operating Load: 4.5 lbs.



## SBH-120 DQ

Black: 618-325

Height: 3.23 in. Weight: 5.80 oz.

Max.Operating Load: 4.5 lbs.



#### **SBH-100 DQ**

Black: 618-324

Height: 2.70 in. Weight: 4.60 oz.

Max. Operating Load: 3.5 lbs.




**CLAMP HEAD 38** 618-020

Height: 3.50 in. Weight: 14.10 oz. Max.Operating Load: 4.5 lbs.

Need a second camera, but don't want to carry a second tripod? The SLIK Clamp Head is your answer

- Clamp it to your tripod leg or light stand to make a second tripod head or sturdy platform
- Will attach to any pole or tubing having a diameter of 1.5 inches (38mm) or less

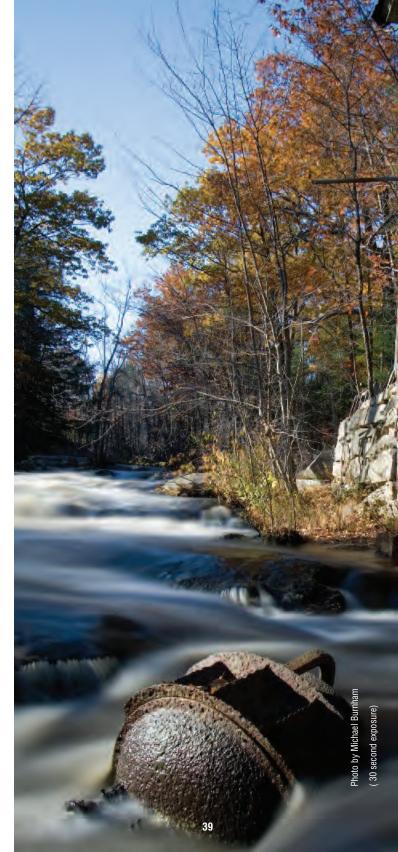





**DQ-L QUICK-RELEASE** ADAPTER 618-711

Magnesium alloy quick-release system for larger cameras



**QUICK-RELEASE** PLATE

Large Magnesium quick-release plate for DQ-L



Quick-release plate for SH 736 HD

**NEW** 

618-716

618-731

6122

6256

Quick-release plate for U9000, U8000, and U6000, U5500, SDV-20, SDV-30



6011 618-730

Quick-release plate for 505QF, 506QF



6019 618-734

Quick-release plate for AF2100



**DQ-S QUICK-RELEASE** ADAPTER 618-713

Magnesium alloy quick-release system for smaller digital and film cameras



**QUICK-RELEASE** PLATE

618-714

618-712

Small magnesium quick-release plate for DQ-S



6027 618-735

(a) 

Quick-release plate for F740, F630, F163,

618-738

Quick-release plate for 504 QF-II, DV TRAVEL PRO



618-737 6014

Quick-release plate for EZ POD, 511 QF and Video Sprint



**DQ-10 MINI QUICK-RELEASE** ADAPTER

618-743



**DQ-20 COMPACT QUICK RELEASE ADAPTER** 

618-742



6121 618-752

Quick-release for U212 DX



6123 618-330

Quick-release for Able 300 DX, PRO 330 DX, PRO 340 DX, PRO 400 DX, SH-705E



6222

F153, F143

6183 BK 618-740



6179 **DW-PKS03** 

Quick-release plate for DST-3



6124 618-335

and BH 800 (1/4-20)



6125 618-340

Quick-release for PRO 700 DX Quick-release for PRO 700 DX and BH 800 (3/8)



Quick-release for SH-807E,

SH-806E. PRO 780 DX,

6196 618-811

PRO 580 DX

Quick-release plate for the SPRINT PRO 3-Way, PRO 614 DX, SH-704E, and AF-1100E, SH-707E, SPRINT PRO EZ



6129 618-003

Quick-release plate for DST-33, TELE-BALANCE 3, FIELD BALANCE



## accessories

SLIK offers a selection of short columns for low angle photography as well as extra and replacement quick-release shoes for SLIK tripods. Please visit our web site at www.thkphoto.com for a full list of accessories.



**DOLLY II** 

617-702

Universal Dolly





#### **PRO II SHORT COLUMN**

## For the Professional II

618-700

## 330 DX SHORT COLUMN

For the PRO 330 DX, PRO 340 DX 618-301





#### PRO 4 SHORT COLUMN

For Professional, Professional 4 618-800 and Grand Pro 4

#### **300 DX SHORT COLUMN**

For the ABLE 300 DX 615-311



42

### **700 DX SHORT COLUMN**

For the PRO 700 DX

615-312

#### **TRIPOD CASE**

New full featured Tripod bags can hold trip with 3-way pan heads attached, available in 3 sizes.

1660 (660 mm) 618-151 1770 (770 mm) 618-152 1820 (820 mm) 618-153



#### TRIPOD BAG

SLIK Medium Tripod Bag TB-M

SLIK Large Tripod Bag TB-L



## TWIN PAN CAMERA PLATFORM

618-704

Mount 2 cameras side-by-side on one tripod head



#### **VERTICAL CAMERA BRACKET-L**

618-070

Mount this bracket on your tripod head if you mainly shoot with the camera vertical



43

### **TWIN CAMERA PLATE 300**

618-703

Mount 2 cameras side-by-side on one tripod head.



# specifications

\* Denotes tripods that include a free tripod bag.

T.L. stands for "Twist Lock" S.R.L. stands for "Speed Release Lock" Listed maximum load is for properly balanced equipment

Model	Maximum Operating Height		Minimum Operating Height		Maximum Column	Center Extension	Folded Length			Weight		Leg Lock Type	Maximum Load	
ODAND DDO OF 4	in.	mm.	in.	mm.	in.	mm.	in.	mm.	lbs.	grams		T 1	lbs.	grams
GRAND PRO CF 4	100.00	2,540	17.70	450	11.20	285	32.48	825	8.38	3,800	4	T. L.	44.00	20,000
PRO 923 CF *	74.80	1,900	8.50	215	12.20	310	27.90	708	5.11	2,320	3	T. L. T. L.	26.46	12,000
PRO 924 CF * PRO 823 CF *	70.50 66.30	1,790 1,685	7.10 9.30	180 237	12.80 12.60	310 320	21.80 23.60	554 635	5.09 3.56	2,310 1,615	3	T. L.	26.46 18.00	12,000 8,100
PRO 824 CF *	64.10	1,627	7.60	194	12.60	320	18.80	478	3.49	1,585	4	T. L.	18.00	8,100
PRO 723 CF *	65.40	1,662	8.10	205	13.80	350	22.50	571	3.49	1,400	3	T. L.	11.00	5,000
PRO 724 CF *	64.40	1,636	7.10	180	12.80	325	18.10	473	3.11	1,410	4	T. L.	11.00	5,000
PRO 634 CF *	63.10	1,603	3.70	94	11.80	300	18.00	457	2.05	930	4	T.L.	7.05	3,200
PRO 624 CF *	44.70	1,135	3.50	90	8.30	210	14.00	355	1.81	822	3	T.L.	7.05	3,200
THE PROFESSIONAL w/head	78.75	2,000	23.22	590	11.02	280	40.95	1,040	13.90	6,300	3	T. L.	26.45	12,000
THE PROFESSIONAL legs only	78.75	2,000	23.22	590	11.02	280	35.45	900	9.95	4,500	3	T. L.	44.00	20,000
THE PROFESSIONAL-II w/head	72.25	1,835	23.22	590	11.02	280	37.40	950	10.35	4,700	3	T. L.	22.00	10,000
THE PROFESSIONAL-II legs only	72.25	1,835	23.22	590	11.02	280	31.89	810	7.05	3,200	3	T. L.	44.00	20,000
THE PROFESSIONAL 4 w/head	99.50	2,530	23.22	590	11.02	280	42.30	1,075	15.20	6,900	4	T. L.	26.45	12,000
THE PROFESSIONAL 4 legs only	99.50	2,530	23.22	590	11.02	280	36.82	935	11.25	5,100	4	T. L.	44.00	20,000
MASTER CLASSIC	64.10	1,630	-	-	11.60	295	25.59	650	5.65	2,550	3	T. L.	13.25	6,010
PRO 700 DX *	74.80	1,900	24.40	620	14.95	380	29.92	760	7.05	3,200	3	S.R.L.	18.00	8,100
PRO 780 DX *	76.80	1,950	16.25	413	14.95	380	32.40	823	6.95	3,152	3	S.R.L.	19.80	9,000
PRO 700 BH	74.80	1,900	-	-	14.96	380	31.50	800	7.56	3,430	3	S.R.L.	11.00	5,000
PRO 500 DX *	63.95	1,625	13.80	350	11.00	280	27.38	695	5.47	2,480	3	S.R.L.	13.20	6,000
PRO 500 HD *	64.90	1,649	13.93	354	10.25	260	27.93	710	5.91	2,680	3	S.R.L.	11.02	5,000
PRO 580 DX *	64.20	1,630	13.80	350	11.00	280	27.00	685	5.38	2,540	3	S.R.L.	13.20	6,000
PRO 400 DX	61.00	1,550	12.99	330	11.00	280	25.60	650	5.60	2,520	3	S.R.L.	11.00	5,000
PRO 340 DX	57.87	1,470	18.11	460	12.20	310	19.29	490	3.48	1,580	4	S.R.L.	8.80	4,000
PRO 340 EZ	56.50	1,435	10.00	254	12.20	310	19.50	495	3.61	1,640	4	S.R.L.	8.80	4,000
PRO 340 BH *	57.75	1,467	10.00	254	12.20	310	20.28	515	3.26	1,480	4	S.R.L.	8.80	4,000
PRO 340 QF	57.30	1,458	10.75	273	11.40	290	20.87	530	3.92	1,780	4	S.R.L.	8.00	3,600
PRO 330 DX	63.00	1,600	20.07	510	14.10	360	23.60	600	3.46	1,570	3	S.R L.	8.80	4,000
PRO 330 EZ	62.00	1,575	11.25	285	14.10	360	23.40	595	3.66	1,660	3	S.R.L.	8.80	4,000
ABLE 300 DX	61.00	1,550	18.50	470	10.43	265	25.80	655	5.75	2,600	3	T. L.	11.00	4,980
U212 DX	63.50	1,615	8.25	210	10.60	270	26.00	660	5.60	2,560	3	S.R.L.	5.50	2,500
U9000	59.00	1,615	-	-	11.80	300	23.25	590	3.50	1,600	3	S.R.L.	4.50	2,040
U8000	59.00	1,615	-	-	11.80	300	23.25	590	3.30	1,500	3	S.R.L.	4.50	2,040
F740	58.25	1,440	-	-	9.25	235	20.86	530	3.22	1,460	4	S.R.L.	4.50	2,050
F630	57.87	1,470	-	-	12.80	325	22.05	560	2.91	1,320	3	S.R.L.	4.50	2,050
F163	51.78	1,315	-	-	10.82	275	21.26	540	2.34	1,060	3	S.R.L.	3.50	1,580
F153	51.78	1,315	-	-	10.24	260	20.48	560	2.18	990	3	S.R.L.	3.50	1,580
F143	51.78	1,315	- 0.70	-	10.24	260	20.48	560	2.14	970	3	S.R.L.	3.50	1,580
SPRINT PRO II *	63.60	1,615	6.70	170	11.80	300	18.50	470	1.96	940	4	S.R.L.	4.50	2,050
SPRINT PRO II 3-Way GM/BK *	63.85	1,622 1,635	6.95 7.25	177 185	11.80	300 300	18.50 19.10	470 485	2.38 2.82	1,100 1,280	4	S.R.L.	4.50	2,500
SPRINT PRO EZ *	64.40				11.80	300					4	S.R.L.	4.50	2,040
VIDEO SPRINT II SPRINT MINI II	63.86 43.30	1,622 1,100	6.00 6.38	168 162	11.75 11.02	280	18.50 13.80	480 350	2.29 1.72	1,040 780	4	S.R.L. S.R.L.	4.50 4.50	2,050
COMPACT II	38.98	990	14.17	360	7.48	190	14.17	360	1.72	570	4	S.R.L.	2.75	2,050 1,240
MINI II	8.66	220	6.85	174	1.81	46	8.03	204	0.71	320	2	S.R.L.	2.75	1,240
MINI PRO-III *	9.64	245	7.87	200	1.75	45	8.27	210	0.71	320	2	T. L.	2.75	1,240
MINI PRO V *	8.58	218	6.81	173	1.75	45	7.90	200	0.76	345	2	T. L.	2.75	1,240
DST-3	59.45	1,510	13.70	350	-	-	29.72	755	6.28	2,850	3	S.R.L.	8.00	3,630
DST-43	59.29	1,506	28.10	713	-	-	29.84	758	7.50	3,400	3	S.R.L.	8.80	4,000
DST-73	62.60	1,590	30.71	780	-		32.68	830	9.90	4,500	3	S.R.L.	15.43	7,000
504 QF-II	61.40	1,560	18.50	470	10.43	265	27.10	690	5.65	2,570	3	T. L.	8.00	3,600
505 QF	64.55	1,640	-	-	7.09	180	29.55	750	7.95	3,600	3	T. L.	11.00	4,980
515 QF	65.15	1,655	29.55	750	7.09	180	29.90	760	8.20	3,720	3	T.L.	11.00	5,000
DV TRAVEL PRO *	51.80	1,300	12.80	325	-	-	26.60	675	4.30	1,960	3	S.R.L.	8.00	3,630
PRO POD 381 CF	59.05	1,500	19.70	500	-	-	19.70	500	0.85	380	4	T. L	11.00	5,000
THE PRO POD	71.65	1,820	23.85	605	-	-	23.85	605	2.30	1,050	4	T. L	22.00	10,000
PRO POD 600	63.00	1,600	21.05	535	-	-	21.05	535	1.30	600	4	T. L	11.00	5,000
S-POLE II	63.38	1,610	21.65	550	-	-	21.65	550	1.28	580	4	T.L.	8.00	3,630
MONOPOD 350	63.00	1,600	20.05	510	-	-	20.05	510	0.65	300	4	S. R. L	8.00	3,630
LIGHTLY POD III	63.40	1,610	20.50	520	-	-	20.50	520	1.00	460	5	S. R. L	6.60	3,000
SLIM POD II	60.20	1,530	19.69	500	-	-	19.69	500	0.62	280	4	S.R.L.	2.75	1,240
E Z POD	61.80	1,570	18.50	470	-	-	18.50	470	1.45	660	5	S. R. L	8.50	3,850
E Z POD JR	63.0	1,600	20.25	515	-	-	20.25	515	1.10	500	5	S. R. L	8.50	3,850